


LGM 145

Combi Seal

Areas of Use

Utility Meters, Oil Transport, Laboratories, Customs

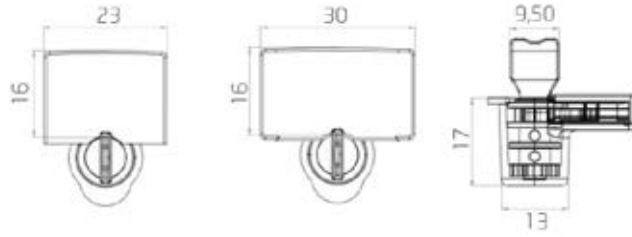

All dimensions in mm.

Product Description

- Made of Polycarbonate (PC) Ultra-Violet resistant body and Polyacethale (POM) coloured insert
- Unique design of anchor-type locking, provides enhanced security and great tamper-proof feature by blocking the colored rotor
- Stainless steel Ø0,63mm, Galvanised Steel Ø0,63 mm and PVC coated Steel Ø0,85 mm sealing wire options
- Requested length of sealing wire can be attached to the seal body
- Barcode or QR-Code option for mobile applications

- Optional marking length, GP145: 23mm GP145-L: 30mm
- White background flag for best contrast
- Complies with RoHS (Restriction of Hazardous Substances) Directive (EU) 2015/863 and its subsequent amendments
- Test reports available for ISO 4892 UV resistance, ISO 9227 Corrosion resistance
- Pull-apart / Tensile strength : 35 Kgf
- Working temperature : -40C / +120C

Product Names	LGM145 with 30 cm Wire	LGM145-L with 30 cm wire
Koli Adedi	1.000 pcs	1.000 pcs
Koli Ölçüsü	39x19x24 cm	39x19x24 cm
Koli Ağırlığı	5,80 kg	5,97 kg
Palet Ölçüsü	80x120x207 cm, 96.000 pcs	80x120x207 cm, 96.000 pcs

Color Options

Please contact our sales team for different color options.



WHITE



RED



ORANGE



YELLOW



GREEN



BLUE